








FOR UP TO 65" TV



• TV Maximum Screen Size: 65"

• TV Maximum Height: 95.25 cm

TV Maximum Width: 156.2 cm

• TV Maximum Depth: 8.9 cm

Maximum Weight: 45.4 kg



Model CL-65 is the fastest, quietest and most reliable hinged flip-down solution on the market. In just 16 seconds you can reveal up to a 65" television from the ceiling, providing an impressive viewing experience in any room. The mechanism features 95° of downward tilt and only requires 15.6 cm of vertical space, creating an incredibly capable lift that is also efficient to install.

- Near Silent Operation
- Easy to Install
- Ships Fully Assembled




All Nexus products are shipped in custom-made protective packaging, and they include everything you need to mount and operate them. The products are designed for easy assembly and simple instructions with photos are included.



MODEL CL-65

TECHNICAL SPECIFICATIONS

- 45.4 kg total lift capacity
- TV maximum screen size: 65"
- Tilts 95° downward
- No exposed tracks, gears or scissors
- UL recognized components
- Draws 3.5 Amps @ 110V and 1.75 Amps @ 220V at max thrust
- 16 seconds to full open
- Quiet runs at just 48 dB
- Screw-driven mechanism
- Aluminum construction
- Your choice of RF remote or Control System Integration Kit (CSI Kit includes IR remote and contact closure interface)
- Collision detection safety software
- "Soft Start" and "Soft Stop" for smooth ride
- Power is Available in These Formats: USA, 110V / Europe, 230V / Japan, 100V Australia, 240V / UK, 230V

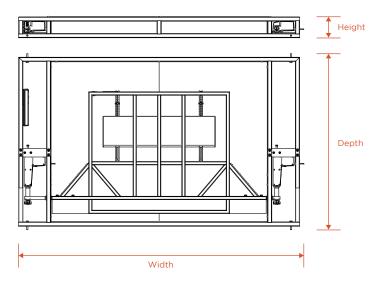

Height: 15.6 cm **Width:** 205.1 cm **Depth:** 123.4 cm

WHAT'S PROVIDED

- Ready to install, assembled CL-65 lift system
- Control box with power cord
- Remote control and receiver (your choice of RF or CSI Kit*)
- Backup control switch
- Lag bolts and self-tapping screws for installation
- Screen locking hardware
- · Allen wrenches for screen locks and adjustability system
- Installation instructions with photos









CONTROL OPTIONS

Your choice of RF remote or Control System Integration Kit (CSI Kit*). Wired button pad included with both.



*CSI Kit includes IR remote and contact closure interface

INSTALLATION TIPS

- **Tip #1** Calculate the weight of the ceiling panel that will attach to the lift before installation so you know you are within the weight limit
- **Tip #2** Bevel the rear edge of the ceiling panel at 45° to achieve a .32 cm reveal
- **Tip #3** Use the adjustment screws to fine tune the ceiling panel so it is flush with the surrounding ceiling

Contact us for more helpful hints!