

SPECIFICATION

Transmitter	
Input Port	1 x HDMI (Female Connector)
Output Port	1 x IR Channel, 2 x Cat5e/6/7
Receiver	
Input Port	1 x IR Channel, 2 x Cat5e/6/7
Output Port	1 x HDMI (Female Connector)
Bandwidth	6.75Gbps
Output Resolution	480i~1080P@50/60,1080P@24/50/60, VGA~UXGA
Operating Temperature	-15 C~55 C/5°F~131°F
Deep Color	36bit
Chassis	Metal
Dimension	83mm(L)x46mm(W)x22mm(H)
Weight	210g
Power Supply	DC 5V

SAFETY PRECAUTIONS

Please read the following safety precautions carefully before you unpack and install this equipment.

CAUTION: Do not use this product for any purpose not explicitly specified by AVS. Improper installation may cause property damage or personal injury. If you do not understand these directions, or have doubts about the safety of the installation, contact AVS Customer Service or call a qualified contractor. AVS is not responsible for damage or injury caused by incorrect mounting, assembly, or use.

1. Do not expose the unit to rain, moisture or any other dripping liquids. And keep it away from any wet locations such as fishing tanks, vases.
2. Do not install the unit close to fire or any other heat sources.
3. Keep the unit in dry and ventilated area. Do not install in bookcase, cabinet or any other confined space.

4. Stop using the unit during thunder or lightening storms.
5. Avoid the power cable being stepped on or pinched. Position the unit carefully to avoid damage or accident.
6. Clean the unit only with dry cloth.
7. Only use accessories specified by the manufacturer.
8. Unplug the equipment when unused for a long period of time.
9. Do not try to open any non-serviceable parts. Contact your authorized servicing center and personnel.

WARNING! This product contains small items that could be a choking hazard if swallowed. Keep these items away from young children!

AV Supply Group (AVS) intend to make this manual accurate and complete. However, AVS makes no claim that the information contained herein covers all details, conditions, or variations. Nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. AVS makes no representation of warranty, expressed or implied, regarding the information contained herein. AVS assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.



AV SUPPLY GROUP LTD

Address:
2/6 Ormiston Road
Flat Bush
Auckland 2016

Phone: (09) 274 9172
Fax: (09) 274 8363
Email: info@avsupply.co.nz
www.avsupply.co.nz

Full 3D Pass-through
Support IR Control
30M Solution



THEATRE

HDMI Extender Over 2 x Cat5e/6/7

User Manual



INTRODUCTION

If you are looking for a way to extend an HDMI signal, then this HDMI Transmitter and Receiver is what you have been searching for. This HDMI extender allows you to use two Cat.5e/6/7 cables to extend the HDTV display up to 30M for 1080P without any signal loss. It is equipped with HDMI connector and is capable of supporting DVI equipment when used with an HDMI to DVI adaptor. And if that weren't enough, you can use a remote to control your device from over 30m away through an IR blaster and receiver pigtail.

It follows the standard of IEEE-568b, Cat.5e/6/7 cable can substitute HDMI cable to achieve long distance transmission. It is designed for use in home theater, professional A/V and personal computer switching applications.

PACKAGE CONTENTS


- 1 x HDMI Transmitter unit, 1x HDMI Receiver unit
- 1 x 5V DC power supply
- 1 x User Manual

FEATURES

- HDMI, HDCP 1.2 and DVI compliant
- Support full 3D pass-through
- Support high resolution up to 1080P
- Super IR control system, IR transport channel can be forward or backward per your installation
- Extend to 30M over 2 x Cat5e/6/7
- Support CEC bypass
- External and internal EDID settings


PANEL DESCRIPTION

Transmitter Unit

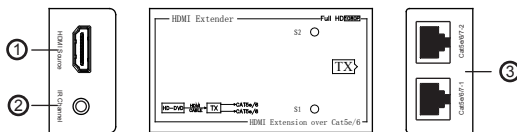

- ① HDMI INPUT
- ② IR OUTPUT
- ③ CAT5E/6/7 OUTPUT

Receiver Unit

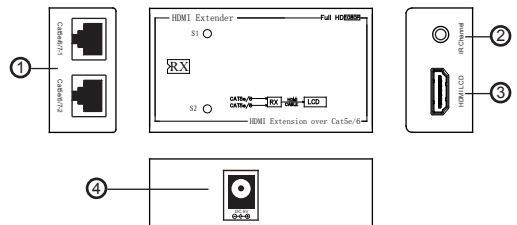

- ① CAT5E/6/7 INPUT
- ② IR INPUT
- ③ HDMI OUTPUT
- ④ POWER SUPPLY INPUT

INSTALLATION

- Connect HDMI input port on transmitter to the signal source equipment such as DVD player.
- Connect the 2x CAT5e/6/7 output on the transmitter with 2 CAT5e/6/7 cables to the CAT5e/6/7 inputs on the receiver.
- Connect to the IR blaster cable (not included in the package) for IR signal transmission. Place the IR blaster in direct line-of-sight of the equipment to be controlled.
- Connect HDMI output port on receiver to HDMI displays.
- Connect to the IR receiver cable (not included in the package) for IR signal reception. Make sure that the remote being used is in direct line-of-sight of the IR receiver.
- Plug the 5VDC power supply into the receiver and connect the adaptor to AC outlet.

CONNECTION DIAGRAM

