




27U internal installation parts

Top
Bottom

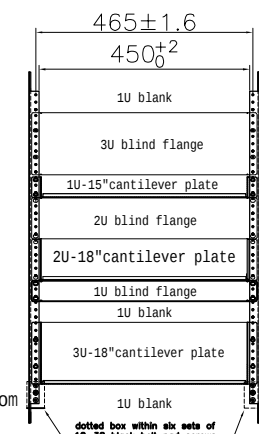

15U internal installation parts

Top
Bottom

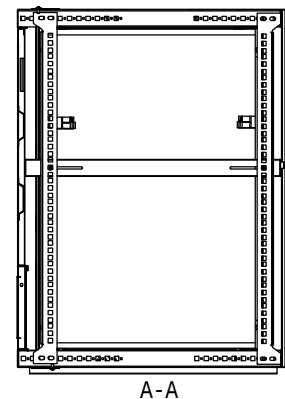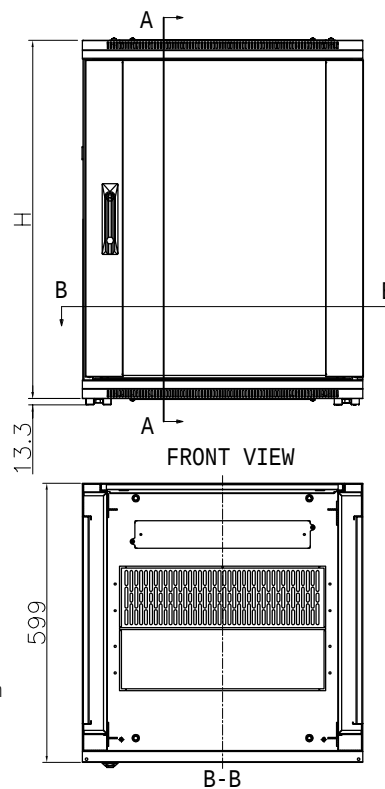

27U	1300.8
15U	767.4
specifications	H

Standard:

Comply with ANSI/EIA
RS-310-D、IEC297-2、DIN41494;PART1;
DIN41494;PART7 ;

Material:

SPCC Cold Rolled Steel;
19" rails: 2.8mm, side panel and back door:1.0mm,
others: 1.2mm

Loading capacity:

Static loading: 400KG

Feature:

- **Completely transparent toughened front door, quick open the side panel and rear panel, convenient and flexible**
- Before and after welding frame assembled cabinet, static load bearing up to 400 kg
- At the top of the back, middle, at the bottom of the back three channel can be shutting down line, into a flexible line position
- Late fan unit from the top rack installation, operation and maintenance is convenient
- Easy to install base, castor, supporting feet