
INSTALLATION INSTRUCTIONS



Portrait Adapter Bracket

TA410

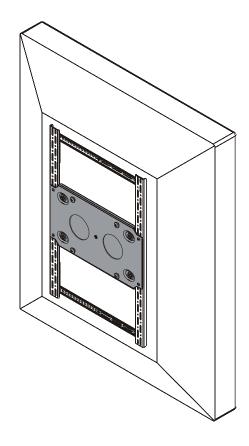

DISCLAIMER

Milestone AV Technologies and its affiliated corporations and subsidiaries (collectively "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.

IMPORTANT WARNINGS AND CAUTIONS!

WARNING: A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.


CAUTION: A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.

WARNING: Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all components are properly assembled and installed using the instructions provided.

WARNING: Failure to provide adequate structural strength for this component can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the structure to which this component is attached can support five times the combined weight of all equipment. Reinforce the structure as required before installing the component.

WARNING: Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all equipment and accessories mounted on the TA410 bracket does not exceed the weight limits specified in the installation instructions of the mount to which it is being attached.


DIMENSIONS

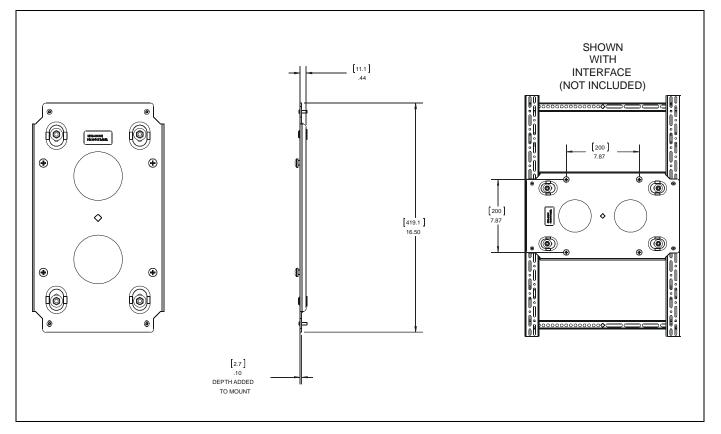


LEGEND

G	Tighten Fastener	Pencil Mark
	Apretar elemento de fijación	Marcar con lápiz
	Befestigungsteil festziehen	Stiftmarkierung
	Apertar fixador	Marcar com lápis
	Serrare il fissaggio	Segno a matita
	Bevestiging vastdraaien	Potloodmerkteken
	Serrez les fixations	Marquage au crayon
C	Loosen Fastener	Drill Hole
	Aflojar elemento de fijación	Perforar
	Befestigungsteil lösen	Bohrloch
	Desapertar fixador	Fazer furo
	Allentare il fissaggio	Praticare un foro
	Bevestiging losdraaien	Gat boren
	Desserrez les fixations	Percez un trou
	Phillips Screwdriver	Adjust
	Destornillador Phillips	Ajustar
	Kreuzschlitzschraubendreher	Einstellen
	Chave de fendas Phillips	Ajustar
	Cacciavite a stella	Regolare
	Kruiskopschroevendraaier	Afstellen
	Tournevis à pointe cruciforme	Ajuster
6	Open-Ended Wrench	Remove
	Llave de boca	Quitar
	Gabelschlüssel	Entfernen
	Chave de bocas	Remover
	Chiave a punte aperte	Rimuovere
	Steeksleutel	Verwijderen
	Clé à fourche	Retirez
60	By Hand	Optional
	A	
	A mano	Opcional
6. (Von Hand	Optional
E S	Von Hand Com a mão	Optional Opcional
(B)	Von Hand Com a mão A mano	Optional Opcional Opzionale
Ex.	Von Hand Com a mão A mano Met de hand	Optional Opcional Opzionale Optie
E CONTRACTOR OF	Von Hand Com a mão A mano	Optional Opcional Opzionale
E Contraction of the second se	Von Hand Com a mão A mano Met de hand	Optional Opcional Opzionale Optie
	Von Hand Com a mão A mano Met de hand À la main	Optional Opcional Opzionale Optie En option
	Von Hand Com a mão A mano Met de hand À la main Hex-Head Wrench	Optional Opcional Opzionale Optie En option Security Wrench
	Von Hand Com a mão A mano Met de hand À la main Hex-Head Wrench Llave de cabeza hexagonal	Optional Opcional Opcional Opzionale Optie En option Security Wrench Llave de seguridad
	Von Hand Com a mão A mano Met de hand À la main Hex-Head Wrench Llave de cabeza hexagonal Sechskantschlüssel	Optional Opcional Opzionale Optie En option Security Wrench Llave de seguridad Sicherheitsschlüssel
	Von Hand Com a mão A mano Met de hand À la main Hex-Head Wrench Llave de cabeza hexagonal Sechskantschlüssel Chave de cabeça sextavada	Optional Opcional Opzionale Optie En option Security Wrench Llave de seguridad Sicherheitsschlüssel Chave de segurança

TOOLS REQUIRED FOR INSTALLATION

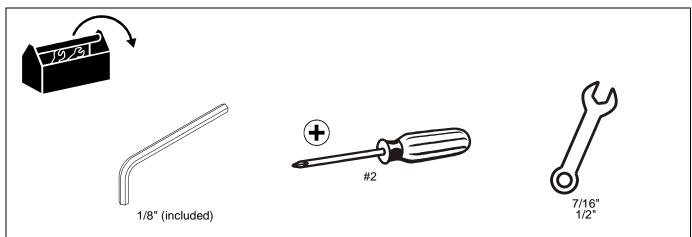

PARTS

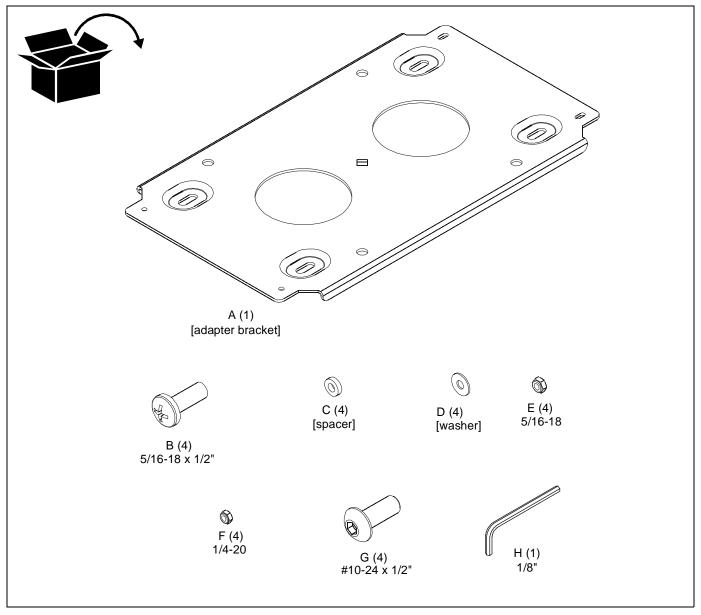

Installation

1. Remove two hex nuts and mounting buttons from top interface support of swing arm. (See Figure 1)

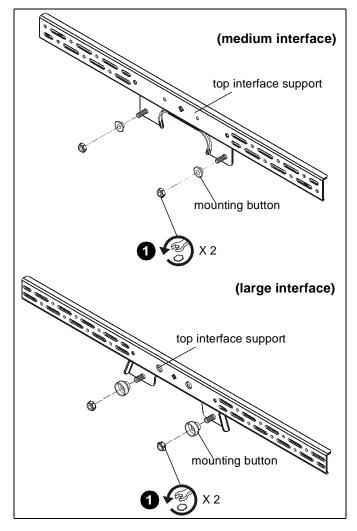


Figure 1

- 2. Attach interface brackets to display according to swing arm mount installation instructions.
- 3. Select proper hex nuts to use in Step 4.
 - Use 5/16-18 hex nuts (E) if installing to TS525 or iCF50 (large) mount
 - Use 1/4-20 hex nuts (F) if installing to TS3XX or iCF30 (medium) mount
- Use four selected nuts (E or F), four washers (D) and four spacers (C) to attach adapter bracket (A) to interface brackets. (See Figure 2)
- Use four #10-24 x 1/2" button head cap screws (G) to secure adapter bracket (A) to interface brackets. (See Figure 2)

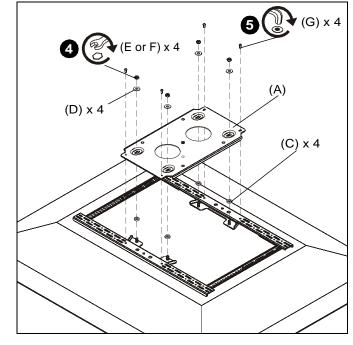


Figure 2

- Install two 5/16-18 x 1/2" Phillips pan machine screws (B) into top two 200 x 200mm holes on adapter bracket (A). (See Figure 3)
- **NOTE:** Do not fully tighten screws into bracket! Let screws hang out at least 1/4" in order to allow the screws to hang onto faceplate in next step!


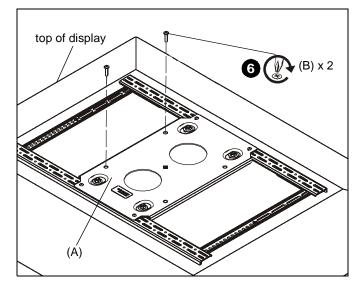


Figure 3

- Hang display onto faceplate inserting two installed Phillips machine screws (B) into upper mounting holes. (See Figure 4)
- Secure adapter bracket to faceplate by installing two 5/16-18 x 1/2" Phillips pan machine screws (B) through lower two 200 x 200mm mounting holes on faceplate and adapter bracket. (See Figure 4)
- 9. Tighten all four screws (B) to fully secure adapter bracket (A) to faceplate.





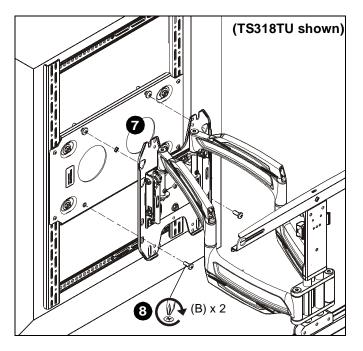

Chief Manufacturing, a products division of Milestone AV Technologies

8805-002020 Rev00 ©2011 Milestone AV Technologies, a Duchossois Group Company www.chiefmfg.com 06/11

USA/International

Europe

Asia Pacific

- A 8401 Eagle Creek Parkway, Savage, MN 55378
- **P** 800.582.6480 / 952.894.6280
- **F** 877.894.6918 / 952.894.6918
- A Fellenoord 130 5611 ZB EINDHOVEN, The Netherlands
- **P** +31 (0)40 2668620
- **F** +31 (0)40 2668615
- A Office No. 1 on 12/F, Shatin Galleria 18-24 Shan Mei Street Fotan, Shatin, Hong Kong
- **P** 852 2145 4099
- **F** 852 2145 4477

