


MODEL L-27i DIAGRAM

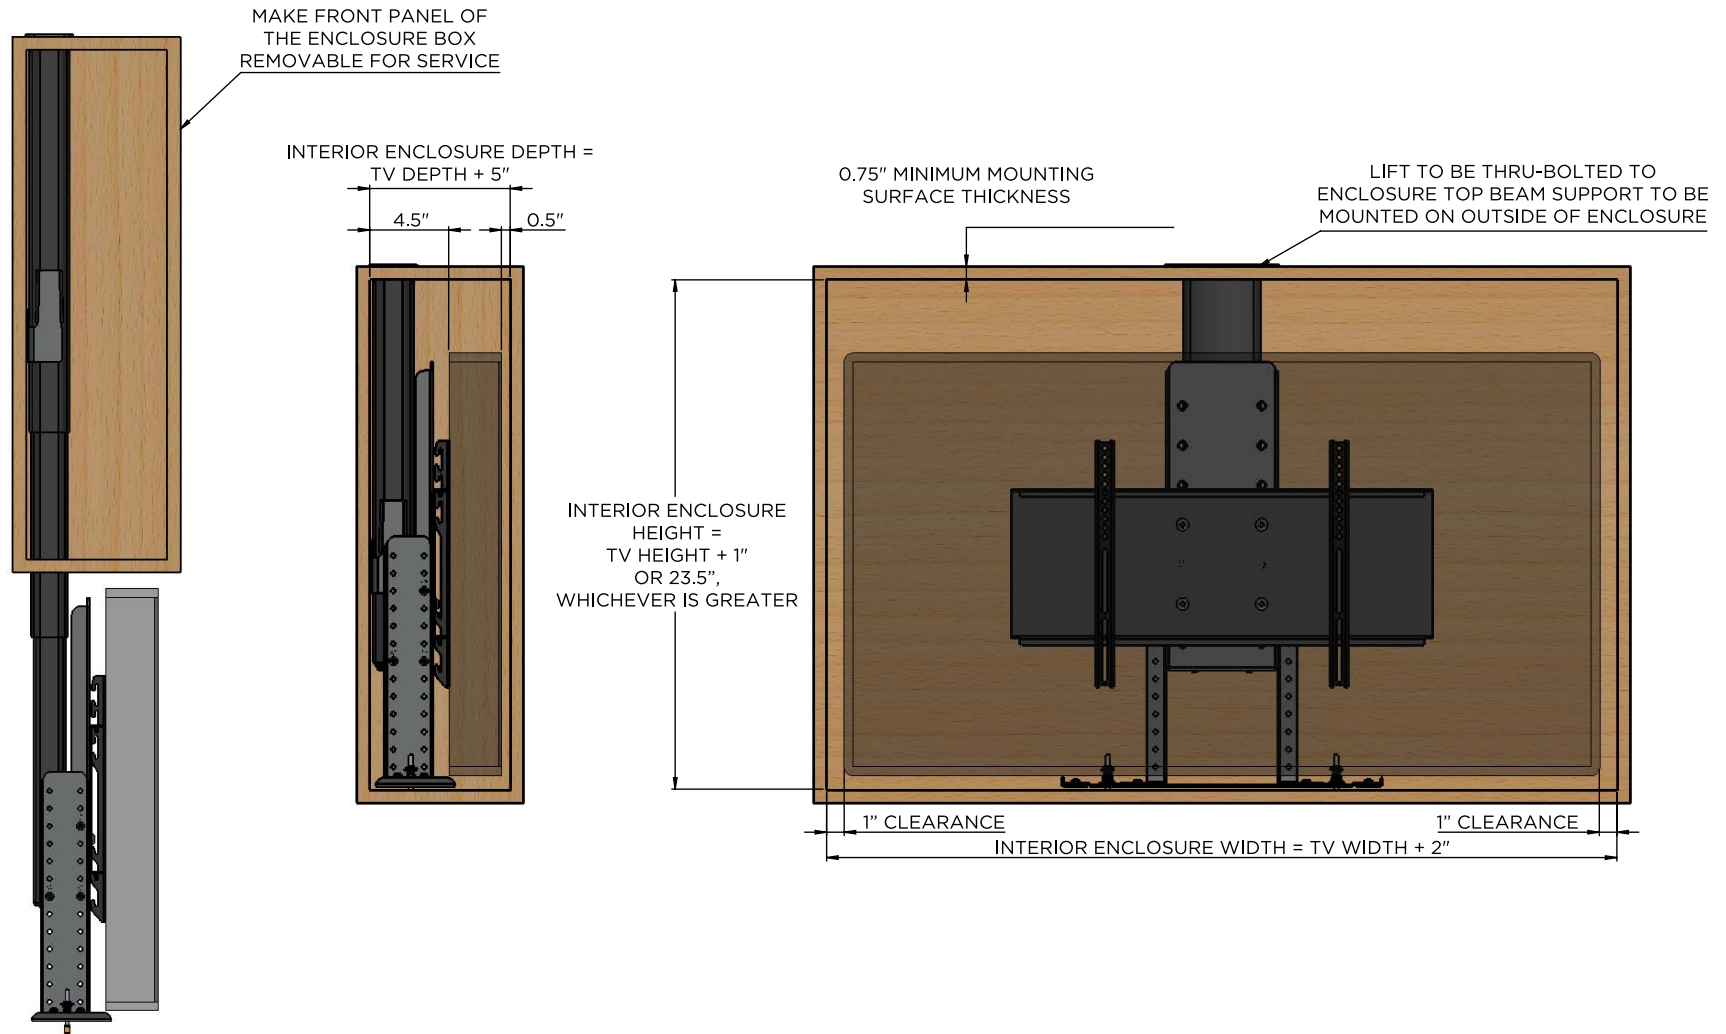

NOTES:

1. NEXUS 21 RECOMMENDS THIS INSTALLATION BE COMPLETED BY A LICENSED CONTRACTOR
2. THE BOX SHOWN IN THE DIAGRAM IS FOR REFERENCE ONLY AND IS NOT PROVIDED WITH THE LIFT SYSTEM
3. LIFT SHOULD BE ENCAPSULATED IN A BOX TO PREVENT EXPOSURE TO HARSH ATTIC ENVIRONMENT
4. FOR THIS LIFT MODEL, THE LENGTH OF ITS TRAVEL [EXTENSION LENGTH OR STROKE] IS 26.5"
5. FOR THIS LIFT MODEL, THE COMBINED TOTAL WEIGHT CAPACITY [INCLUDING TV AND LID] IS 90 LBS
6. HEIGHT OF THIS MODEL IS ADJUSTABLE IN 1/2" INCREMENTS UP TO 8" [MINIMUM HEIGHT = 22.5"; MAXIMUM HEIGHT = 30.5"]
7. SYSTEM SHOULD BE TIED INTO TRUSSES - PER ARCHITECTURAL DRAWINGS
8. ELECTRICAL HOOKUP TO BE INSTALLED PER AUTHORIZED BUILDING CODES
9. LID IS DESIGNED TO FLOAT WITH PROVIDED SPRING LOADED PINS - LID MUST BE INSTALLED PROPERLY FOR SAFETY
10. WHEN DETERMINING TV HEIGHT, ALWAYS USE MANUFACTURER SUPPLIED "TV WITHOUT STAND" HEIGHT
11. LIFT MECHANISM IS POWDERCOATED BLACK STEEL. COLORS IN DIAGRAM ARE FOR CLARITY ONLY.

nexus²¹
CONCEALMENT SYSTEMS

COPYRIGHT 2016 - ALL RIGHTS RESERVED
UPDATED 01/13/16